

AQUA[®]
爱克

The quality come from life
品质源自于生活



臭氧一体机
OZONE INTEGRATED
MACHINE

AWO 系列

AWO SERIES



The quality come from life
品质源自于生活



臭氧一体机 OZONE INTEGRATED MACHINE


AQUA AWO series ozone integrated machine use high quality ozone generator tube. The whole main body are made of 304 stainless steel. It integrates ozone generator, booster pump, Venturi jets, ozone mixing tower for pool and spa water.

AWO ozone and UV purifies pool and spa water to make it pure and transparent, so that the demand for the chemical reducing 90%. At the same time, it neutralizes pungent, irritating all pool chemicals by products. It's advanced anti-return design greatly increase the life of the ozone generator.

AWO系列臭氧一体机是采用优质的臭氧发生管，整机主体均采用304不锈钢打造而成。它集臭氧发生器，增压泵，文丘里射流器，臭氧混合塔于一体为泳池和水疗用水保驾护航。

AWO臭氧净化泳池和水疗用水，使之纯净透明，使对化学品的需求降低90%，同时中和刺鼻、刺激性的所有泳池化学品副产物。它增加了先进的防回水设计，极大的增长了臭氧发生器的寿命。

臭氧射流系统 OZONE JET SYSTEM

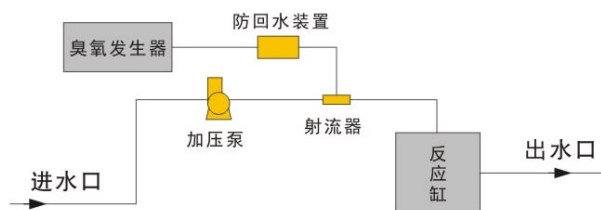

- Integrated design, simple installation, small area occupied.
- 一体式设计，安装简单，占地小
- One-click control, operating without professional.
- 一键式控制，操作无须专业人员
- 304 stainless steel body, good looking, anti-corrosion, easy cleaning.
- 主体304不锈钢打造，美观，防腐，易清洁
- 5-50g/h production, a variety of models to adapt to different sizes of pool
- 5-50g/h产量，多种型号适应不同池子的大小。
- Anti-return design, greatly increase the life of the ozone generator.
- 防回水设计，大大增长臭氧发生器的寿命
- With stainless steel base and brackets.
- 配有不锈钢底座及支架

Specification:

技术参数

Model 产品型号	Voltage 额定电压	Port Size 接口尺寸	Ozone Concentration 臭氧浓度	Total Power 运行功率	Maximum Ozone Output 最大臭氧产量	Reaction Cylinder Specifications 反应缸规格	Ozone Generator Power 臭氧机功率	Booster Pump Power 增压泵功率	Size 产品尺寸	Suitable Pool Size 适合泳池大小
AWO-5	220V/50Hz	1"	15-25mg/L	600W	5g/h	φ300×1200mm	50W	550W	1000×500×1450mm	75~150m³
AWO-10	220V/50Hz	1"	15-25mg/L	630W	10g/h	φ300×1200mm	80W	550W	1000×500×1450mm	150~250m³
AWO-15	220V/50Hz	1"	15-25mg/L	670W	15g/h	φ400×1600mm	120W	550W	1000×500×1750mm	225~400m³
AWO-20	220V/50Hz	1"	15-25mg/L	710W	20g/h	φ400×1600mm	160W	550W	1000×500×1750mm	300~500m³
AWO-30	220V/50Hz	1"	15-25mg/L	790W	30g/h	φ500×1600mm	240W	550W	1100×600×1750mm	450~600m³
AWO-40	220V/50Hz	1"	15-25mg/L	870W	45g/h	φ500×1600mm	320W	550W	1100×600×1750mm	670~800m³
AWO-50	220V/50Hz	1"	15-25mg/L	950W	50g/h	φ600×1600mm	400W	550W	1100×600×1750mm	750~900m³
AWO-60	220V/50Hz	1"	15-25mg/L	1000W	60g/h	φ600×1600mm	450W	550W	1100×600×1750mm	900~1000m³